


Cashier Helper - Registration Operation Manual

Setup of the counter


- [Cashier Counter](#)

Setup Mobile and Receipt Printer


- Connect the Phone to the wiFi (SSID: int-congress), check if the IP address is 192.168.88.x
- Plug in the USB charging cable to the phone and USB Charger to start charging the phone.
- Open the Congress Helper app and login with the "congress code". (ask the organizer)
- Click [Settings] and login with helper user account password.

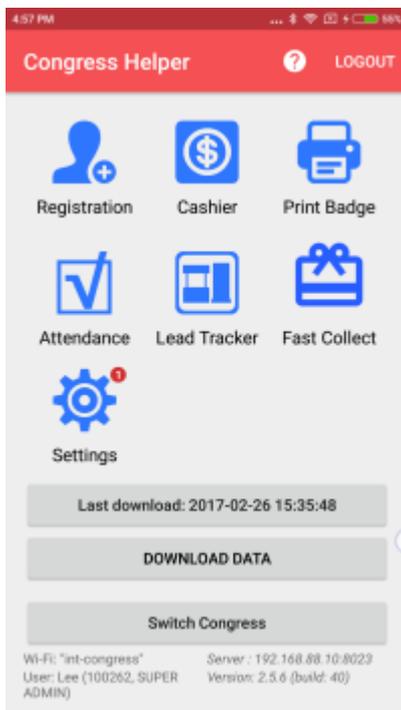


- Click [Bluetooth] to display a list of bluetooth devices.

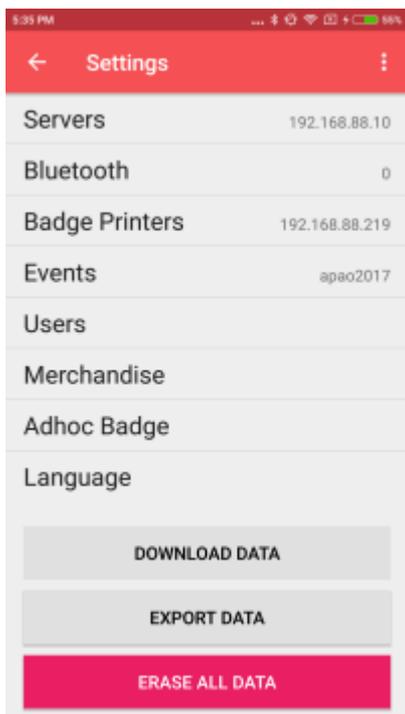


- Switch on the receipt printer.
- Check the yellow label on the receipt printer. There will be 2 entries for each printer, click the corresponding [on/off] switch next to “RPP300-E” to pair it.

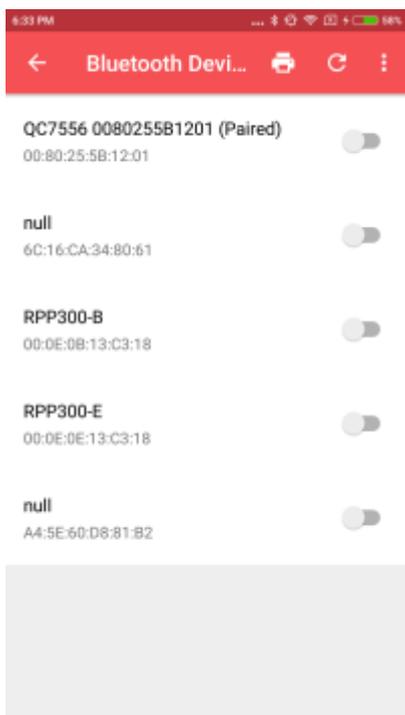

- Enter the password “0000” if need.

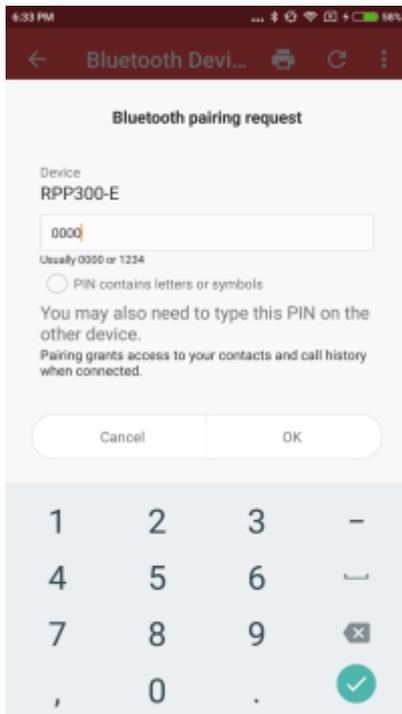


- It should be displayed as connected if ok.

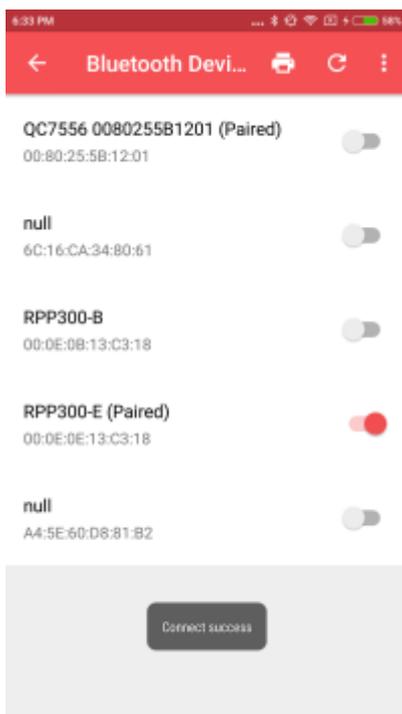


- Go back to the home screen of the app by clicking the top-left [←- Back] button twice.

Cashier


- Click [Cashier] button.
- Scan a delegate badge QR Code.
- It will display a list of that delegate items.
- Review the various Ribbon listed with “grey” background.

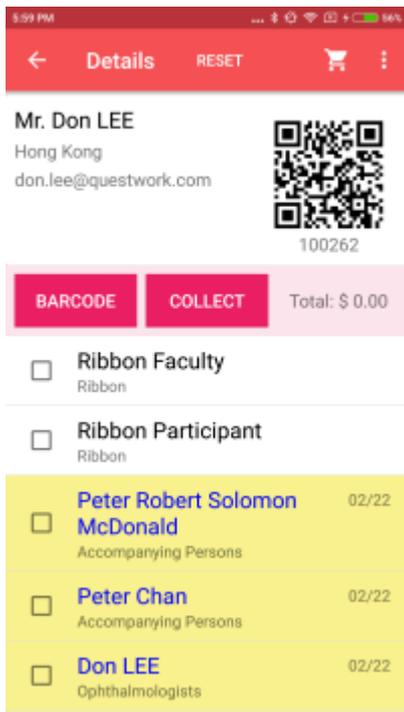

- Click all the checkbox next to the corresponding ribbons and then click [Collection] button.

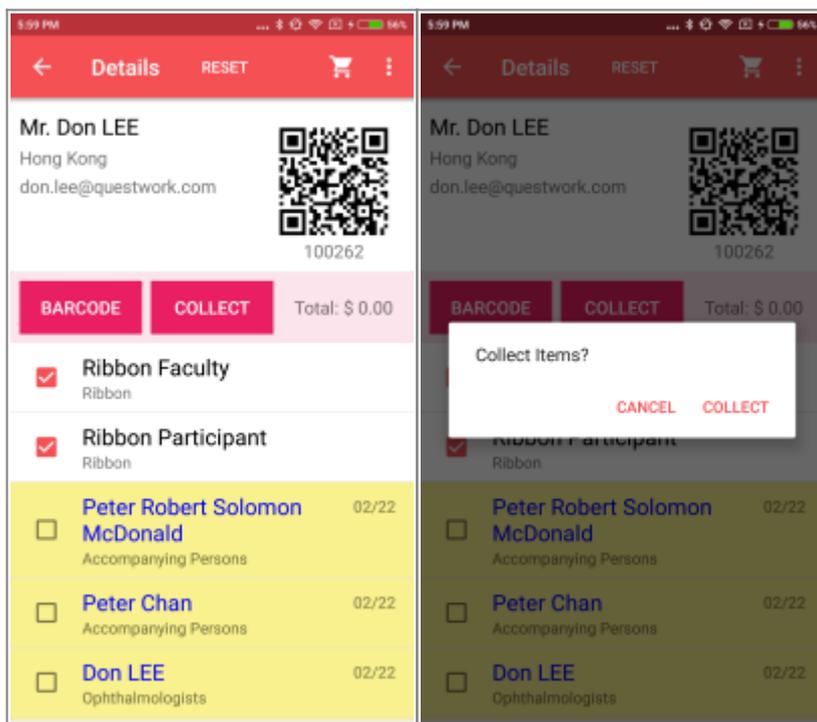

- All Ribbon items should now be changed to “yellow” background.

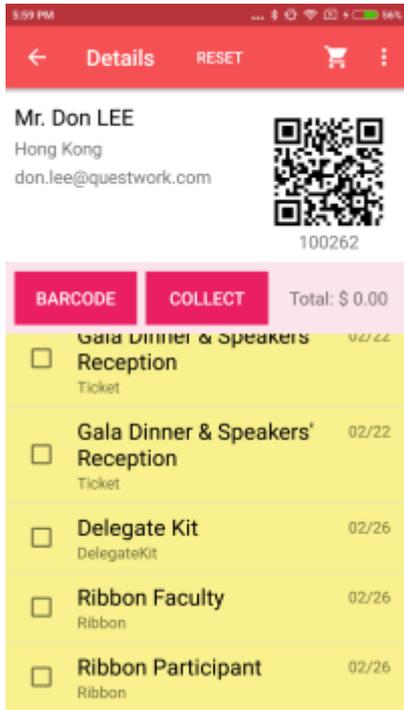

- Scan another badge and repeat the above steps for collection.

From: <https://wiki.questwork.com/dokuwiki/> - Questwork's Wiki

Permanent link: https://wiki.questwork.com/dokuwiki/doku.php?id=course:congress_setup:operations_manual:registration:cashier_helper&rev=1488105670

Last update: 2017/02/26 18:41

