2025/10/26 16:53 1/4 Gulp Tasks

Gulp Tasks

Install

• Gulp Tasks

Required

• Install gulp-cli globally


npm install -g gulp-cli

Example

• When you complete the above steps, you will see the following screen.

Last update: 2022/03/08 development:tools:vscode:gulp_tasks:start https://wiki.questwork.com/dokuwiki/doku.php?id=development:tools:vscode:gulp_tasks:start&rev=1646672427 01:00

2025/10/26 16:53 3/4 Gulp Tasks

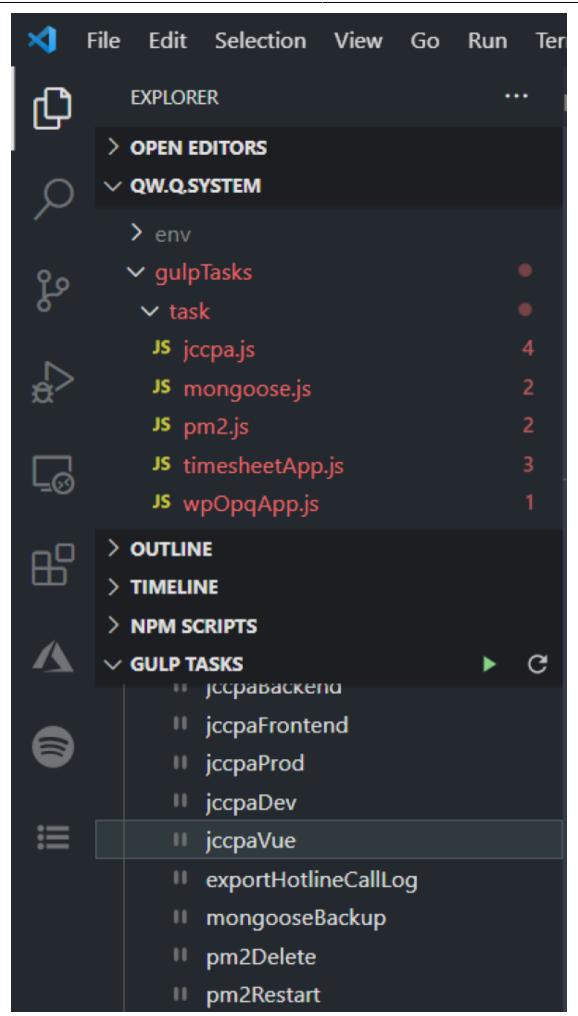

 $\frac{\text{upuale.}}{2022/03/08} \\ \text{development:tools:vscode:gulp_tasks:start} \\ \text{https://wiki.questwork.com/dokuwiki/doku.php?id=development:tools:vscode:gulp_tasks:start&rev=164667242726203/08} \\ \text{development:tools:vscode:gulp_tasks:start&rev=164667242726203/08} \\ \text{development:tools:vscode:gulp_tasks:start&rev=1646672427203/08} \\ \text{development:tools:vscode:gulp_tasks:start&rev=1646672427203/08} \\ \text{development:tools:vscode:gulp_tasks:start&rev=1646672427303/08} \\ \text{development:tools:vscode:gulp_tasks:tools:vscode:gulp_tasks:start&rev=1646672427303/08} \\ \text{development:tools:vscode:gulp_tasks:tools:tools:vscode:gulp_tasks:tools:vscode:gulp_tasks:tools:t$

- Select the task and click the green start button to start the task.
- You will see the output of the task in Terminal's OUTPUT.
- You can selset the task and click the stop button to stop the task.
- Normal tasks will be automatically disconnected after running. But when doing webpack dev server, the task will be finished first, but the OUTPUT will always be connected.
- In MacOS, click the stop button will disconnect OUTPUT.
- But in Windows will not disconnect OUTPUT. In other words, the app is still running in the background.
 - At this moment, you'd better use the command line to run the gulp task.
 - If you use Gulp Tasks to run the webpack dev server related tasks, you can use some Windows commands to kill the process

```
// open a CMD window
// find the app port, like "8080", the result will show the app's pid
netstat -ano |findstr "port"
// kill the process according to the pid
taskkill /f /t /im "pid"
```

Problem

If you encounter the following problems, please try to 'project dependent download'

```
npm install gulp --no-fund
```

```
PS D:\0workspace\questwork\qsystem> gulp
  p : 无法将"gulp"项识别为 cmdlet、
                                  脚本文件或可运行程序的名称。请检查名称的拼写
     包括路径,请确保路径正确,然后冉试
                      : ObjectNotFound: (gulp:String) [], CommandNotFoundException
```

https://wiki.questwork.com/dokuwiki/ - Questwork's Wiki

https://wiki.questwork.com/dokuwiki/doku.php?id=development:tools:vscode:gulp_tasks:start&rev=164667242

Last update: 2022/03/08 01:00

